



Haoma Mining NL

A.B.N 12 008 676 177

Registered Office & Head Office:

Level 1, 401 Collins Street, Melbourne, Vic., 3000, GPO Box 2282U, Melbourne, Vic., 3001.

Telephone (03) 9629 6888, Facsimile (03) 9629 1250

Email: haoma@roymorgan.com Website: www.haoma.com.au

August 11, 2010

Company Announcements Platform
Australian Stock Exchange
Level 45, Rialto South Tower
525 Collins Street
MELBOURNE VIC. 3000

Dear Sirs,

DALTONS-MT WEBBER DEPOSIT - INFILL DRILLING RESULTS CONFIRM RESOURCE QUALITY

- **Daltons–Mt Webber deposit infill RC drilling results confirm deposit quality and continuity;**
 - **78 metres (to end of hole) @ 59.8% Fe (65.8%CaFe), 0.11% P, 0.8% Al₂O₃**
 - **68 metres @ 60.1% Fe (64.4%CaFe), 0.09% P, 1.4% Al₂O₃**
 - **58 metres @ 59.1% Fe (63.6%CaFe), 0.10% P, 1.8% Al₂O₃**
- **Upgrade in resource category from Inferred to Indicated Resource in progress to allow Ore Reserve estimates for Pre-Feasibility detailed mine engineering work..**
- **DSO Exploration Target# established of 60 to 80 million tonnes @ 56-60% Fe for Daltons JV tenements, including several new hematite zones to the west of Mt Webber following additional mapping and rock sampling.**

The Directors of Haoma Mining NL are pleased to provide a further progress update on development activities at the Daltons-Mt Webber iron ore project. The Daltons Joint Venture (Haoma 25% interest, Giralia Resources NL 75% interest), covers four tenements located approximately 150 kilometres south of Port Hedland in the Pilbara region of Western Australia, including the Daltons-Mt Webber iron ore deposit with an Inferred Resource of 40 million tonnes @ 57.3%Fe.

Haoma retains rights to 100% of the gold/silver and tin/tantalum mineralisation.

Results have been received for infill RC drilling completed to test for continuity of the flat-lying, near surface hematite-goethite mineralisation at the Daltons-Mt Webber deposit to allow upgrade of resource category from Inferred to Indicated. Intersections from the infill drilling are shown in Table 1, and hole locations are shown in Figure 2. Better results include; **78 metres (to end of hole) @ 59.8% Fe (65.8%CaFe), 0.11% P, 0.8% Al₂O₃, 68 metres @ 60.1% Fe (64.4%CaFe), 0.09% P, 1.4% Al₂O₃, and 58 metres @ 59.1% Fe (63.6%CaFe), 0.10% P, 1.8% Al₂O₃**. An upgraded resource estimate is anticipated in approximately 2 weeks.

Additionally, follow up rock chip sampling and mapping has been completed in the Soanesville area approximately 10 kilometres west of the Mt Webber deposit, where several undrilled zones of outcropping hematite mineralisation were recognised in helicopter reconnaissance conducted in late 2009, (Figure 3). Following receipt of assays from rock samples (see Table 2) an overall DSO Exploration Target# of **60 to 80 million tonnes @ 56-60% Fe** has been established for the Daltons JV tenements, inclusive of the current Mt Webber resource, and including several smaller hematite zones near Mt Webber and in the Soanesville area.

Perth Office:

Suite 22 Piccadilly Square 7 Aberdeen Street, Perth, W.A. 6000

Tel: (08) 9325 4899

Fax: (08) 9221 1341

Background on Daltons-Mt Webber Deposit

The Daltons Joint Venture Mt Webber iron ore deposit has an Inferred Mineral Resource reported on September 14, 2009 of **40 million tonnes @ 57.3% Fe**, including 33.8 million tonnes @ 57.9% Fe, 1.44% Al₂O₃ (63.06% CaFe) in the Main Southern Zone. The Daltons JV's Mt Webber tenements directly adjoin Atlas Iron Limited's Mt Webber prospect, which has a reported resource of 43.7 million tonnes @ 57.4% Fe.

Pre-Feasibility Study elements were commissioned at Daltons–Mt Webber following the release on December 17, 2009 of the findings of an independent Scoping Study on development options, targeting the production of direct shipping iron ore (“DSO”), initially at 2 million tonnes per year by open pit mining and road haulage to Port Hedland.

Detailed environmental studies are well advanced, with consultants ecologia Environment contracted to undertake all environmental investigations and environmental impact assessment documentation required for a proposed 2mtpa mine through to mining approvals. Groundwater consultants Aquaterra have been contracted to undertake borefield search and licensing. Additional PQ diameter drill core is currently undergoing metallurgical testing at Ammtec for product specification with a further 5 holes now completed.

A Mining Lease application was lodged in late April covering the Mt Webber deposit and environs, and a new northern access ramp road has been constructed. The implementation schedule for the project indicates that it may be possible to achieve first production by October 2011.

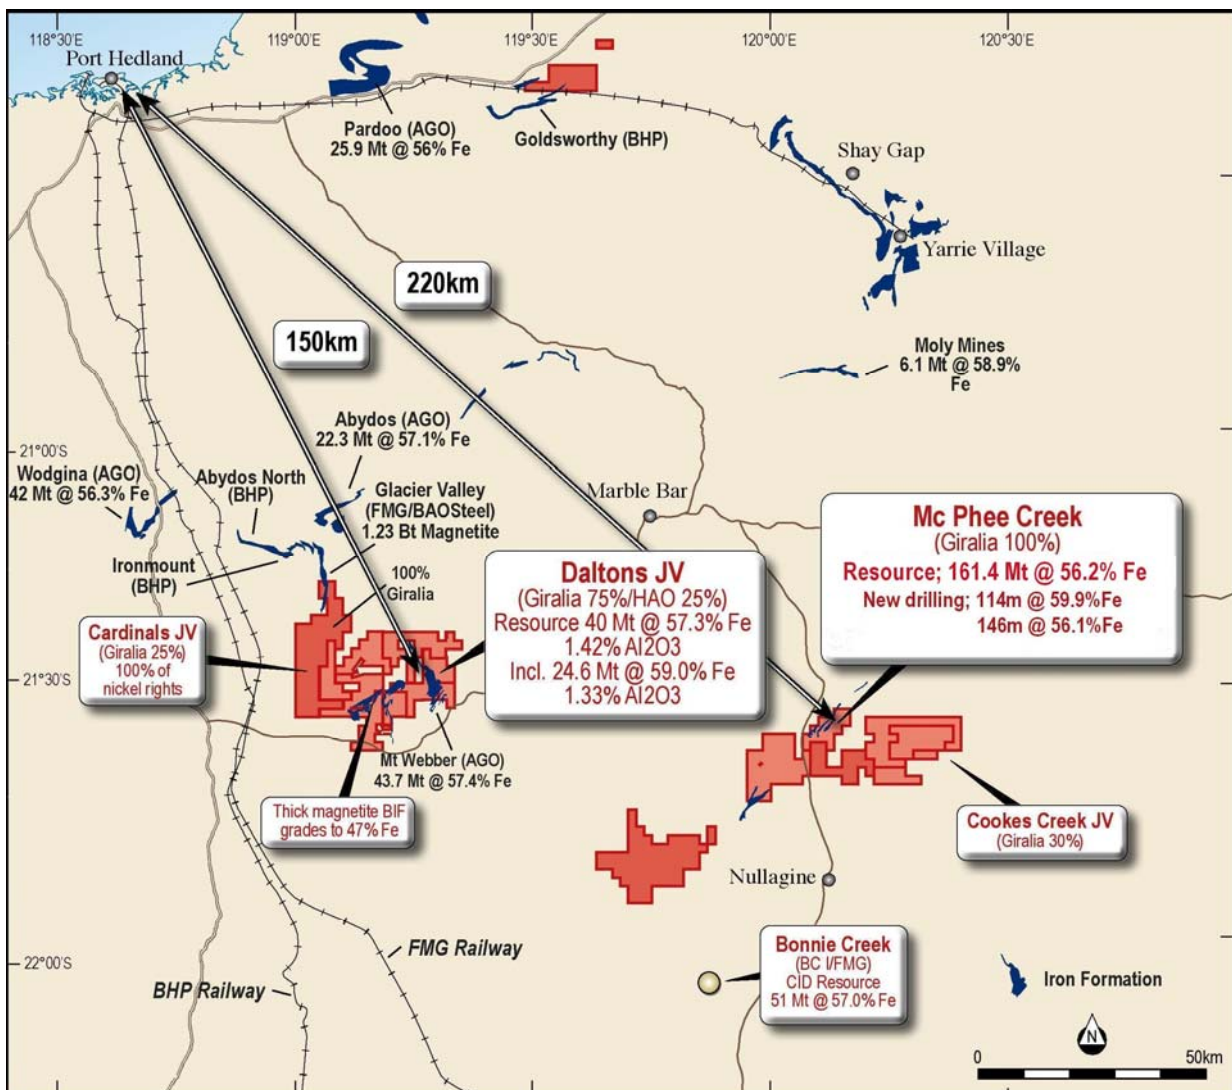


Figure 1: Location plan Daltons Joint Venture tenements

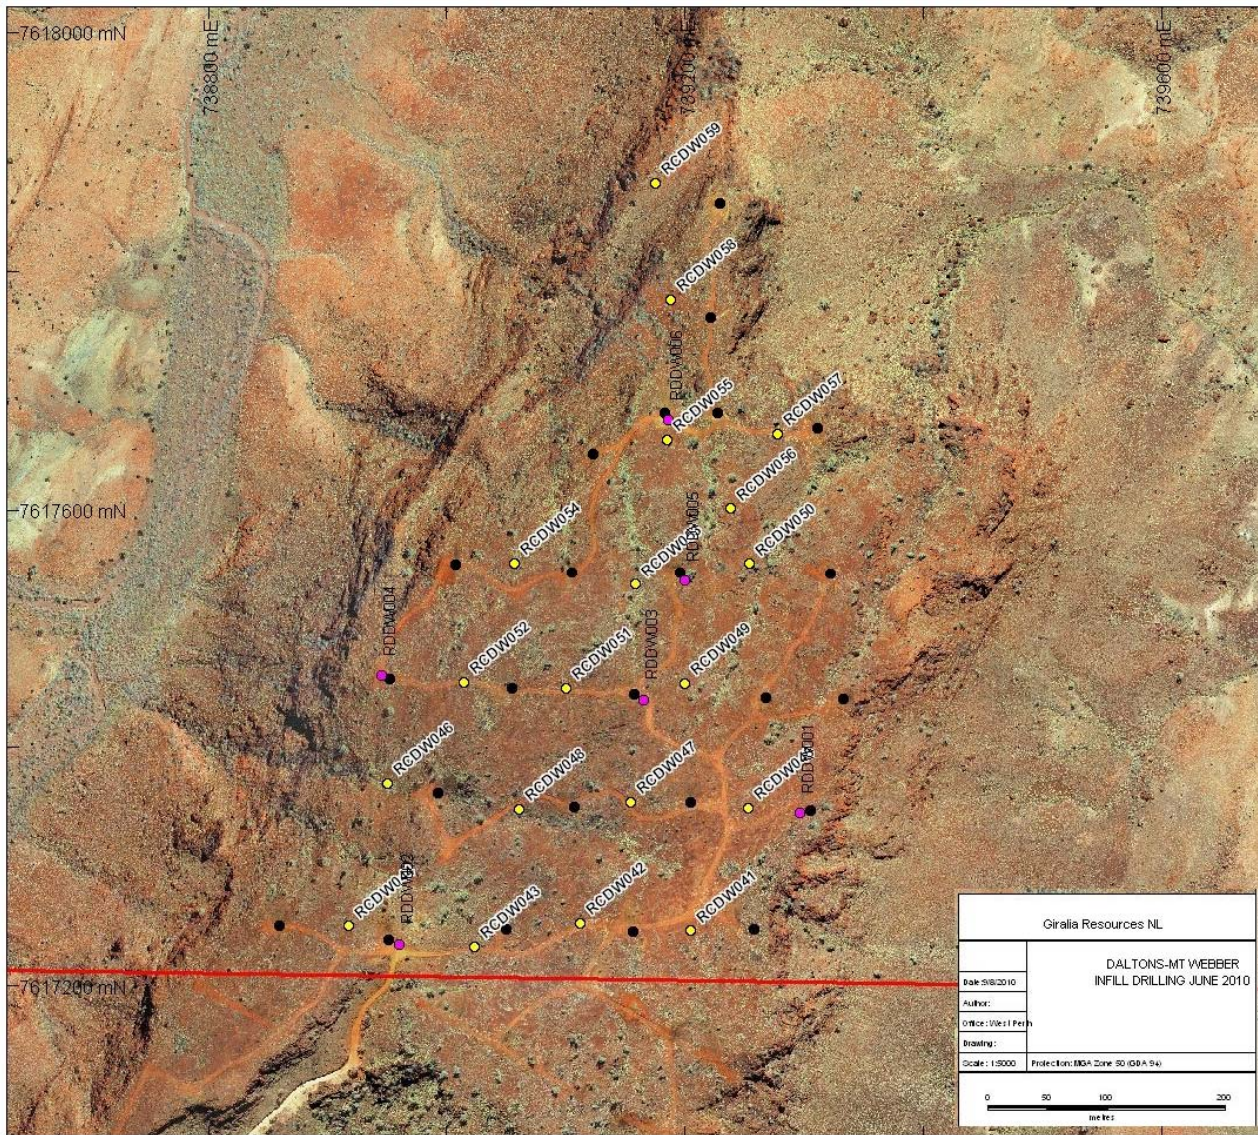


Figure 2:
Main Southern Hill at Daltons - Mt Webber deposit showing 2009 drill collars (black dots), new June 2010 infill holes (yellow dots) and PQ diameter core holes (purple dots)

The information in this report that relates to Exploration Results is based on information compiled by R M Joyce, who is a Member of the Australasian Institute of Mining and Metallurgy and a full time employee of Giralia Resources NL. Mr Joyce has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2004 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Joyce consents to the inclusion in the report of the matters based on the information in the form and context in which it appears.

The term "Exploration Target" should not be misunderstood or misconstrued as an estimate of Mineral Resources or Ore Reserves as defined by the JORC Code (2004), and therefore the terms have not been used in this context. Exploration targets are conceptual in nature, and it is uncertain if further exploration or feasibility study will result in the determination of a Mineral Resource or Ore Reserve.

Table 1: Table of Intersections Daltons-Mt Webber Deposit RC infill drilling June 2010

Hole No	Coordinates		Dip / Az	Depth (m)	From (m)	To (m)	Interval (m)	Fe %	CaFe %	P %	SiO2 %	Al2O3 %	LOI %
	East	North											
RCDW041	739205	7617246	60/90	110	4	72	68	60.1	64.4	0.09	5.6	1.4	6.6
				and	84	104	20	50.7	53.8	0.02	19.7	0.5	5.7
RCDW042	739112	7617252	60/90	118	0	52	52	54.0	59.6	0.09	9.5	2.7	9.4
				incl.	32	52	20	56.5	62.7	0.10	7.0	1.7	9.9
RCDW043	739024	7617233	60/95	94	10	44	34	58.1	64.0	0.11	5.8	1.5	9.1
RCDW044	738917	7617250	60/93	64	0	64	64 (EOH)	57.5	62.8	0.11	6.4	2.4	8.4
RCDW045	739253	7617349	60/90	118	0	36	36	57.5	62.5	0.09	7.5	1.8	8.0
				incl.	16	34	18	60.6	65.5	0.10	4.5	1.3	7.5
				and	40	52	12	50.1	52.8	0.04	22.0	0.7	5.1
				and	86	112	26	56.9	61.2	0.04	8.1	1.5	7.2
RCDW046	738951	7617370	60/90	70	0	24	24	57.8	61.9	0.10	6.3	3.7	6.9
				incl.	8	24	16	63.7	67.3	0.10	2.3	1.1	5.2
RCDW047	739154	7617354	60/90	94	4	28	24	55.9	60.5	0.10	9.8	1.2	7.6
				incl.	4	22	18	58.1	62.8	0.11	7.2	0.9	7.5
				and	32	46	14	51.1	53.8	0.05	19.0	1.3	4.9
RCDW048	739060	7617348	60/90	76	0	36	36	58.9	63.1	0.09	6.6	2.0	6.6
				incl.	2	32	30	60.3	64.4	0.08	5.2	1.8	6.4
RCDW049	739200	7617454	60/90	76	0	44	44	56.1	60.0	0.08	11.4	1.0	6.4
				incl.	12	38	26	59.9	64.1	0.09	6.4	0.9	6.5
RCDW050	739254	7617555	60/90	94	0	64	64	56.2	62.3	0.09	6.6	2.2	9.8
				incl.	10	60	50	57.1	63.3	0.09	5.4	2.2	9.8
RCDW051	739100	7617450	60/90	58	0	30	30	57.5	62.4	0.07	7.1	1.6	7.9
				incl.	8	30	22	60.4	65.2	0.08	4.7	1.2	7.4
				and	38	44	6	52.9	56.9	0.11	15.1	0.7	7.1
RCDW052	739015	7617455	60/90	64	0	58	58	59.1	63.6	0.10	6.1	1.8	7.1
RCDW053	739159	7617537	60/90	58	0	56	56	56.4	61.1	0.10	10.0	1.0	7.5
				incl.	0	42	42	58.8	63.8	0.10	6.3	1.1	7.7
RCDW054	739057	7617556	60/90	58	0	34	34	58.6	63.3	0.09	6.7	1.9	7.4
RCDW055	739185	7617659	60/90	88	10	88	78 (EOH)	59.8	65.8	0.11	3.9	0.8	9.1
RCDW056	739238	7617601	90/0	70	2	46	44	56.5	61.9	0.09	7.7	1.7	8.7
				incl.	8	44	36	57.7	63.5	0.09	5.7	1.7	9.0
				and	64	70	6 (EOH)	58.0	62.6	0.04	7.4	1.9	7.3
RCDW057	739278	7617664	60/90	94	12	68	56	57.6	64.2	0.11	5.2	1.0	10.3
				incl.	20	68	48	58.7	65.4	0.12	3.9	0.7	10.3
				and	82	92	10	56.0	61.2	0.10	10.3	0.6	8.5
RCDW058	739188	7617776	90/0	64	0	4	4	53.9	60.5	0.10	8.2	2.7	10.9
RCDW059	739175	7617874	60/270	94				NSV					

Intersections quoted using lower cut-offs of 50% and 55% Fe.

All coordinates in MGA Zone 50 GDA 94, by hand held GPS ($\pm 6m$).

NSV= no intersections of 2m @ >50% Fe.

XRF analyses by Spectrolab Laboratory Geraldton.

RC drill samples collected as 2 metre riffle split composites.

QA/QC included field duplicate samples and two standards (Certified Reference Material), comprising one coarse standard and one pulverised standard.

EOH means iron intersection open at end-of-hole.

CaFe is a measure of iron content upon removal of volatiles (i.e. LOI).

Table 2: Daltons JV- Rock Chip sample results July 2010 Soanesville area (10km west of Mt Webber deposit).

SAMPLE	EAST	NORTH	Fe %	P %	SiO2 %	Al2O3 %	LOI %
DW001	727441	7614219	58.2	0.15	4.06	1.71	10
DW002	727698	7613673	59.5	0.16	2.32	1.17	10.45
DW003	726525	7616063	48.8	0.03	2.93	8.81	10.67
DW004	726384	7616065	59.5	0.08	2.64	1.14	10.66
DW005	726407	7615879	41.2	0.05	4.46	18.7	7.91
DW006	726347	7615451	57.7	0.24	3.54	1.83	10.88
DW007	726197	7615634	51.9	0.21	7	5.44	9.96
DW008	727050	7616137	57.9	0.12	4.24	2.15	9.18
DW009	727148	7616247	56.3	0.37	5	2.35	10.7
DW010	727206	7616344	57.6	0.26	3.76	2.58	10.25
DW011	727311	7616471	53.5	0.39	8.19	3.21	10.72
DW012	727177	7616579	54.3	0.08	12.25	0.81	8.74
DW013	727956	7616577	58.2	0.28	2.41	1.9	11.48
DW014	728016	7616696	50.8	0.33	8.65	5.03	9.77
DW015	727983	7616835	50.9	0.23	6.78	7.02	11.87
DW016	727950	7616945	62.0	0.10	2.26	0.67	7.82
DW017	727918	7617154	55.5	0.23	2.9	4.5	9.86

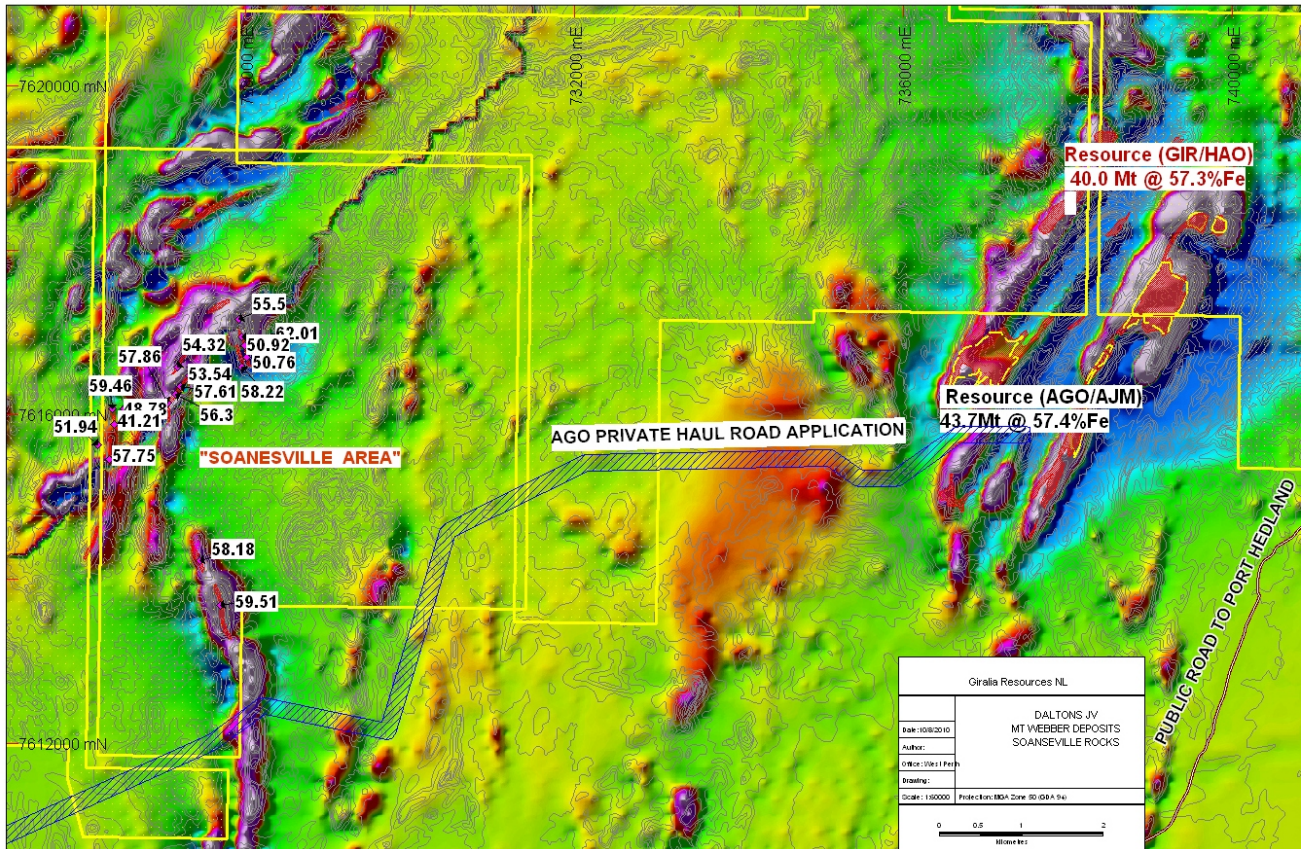


Figure 3: Daltons JV eastern portion aeromagnetic image, showing Mt Webber deposits and new Soanesville area sampling results (Fe %).

For further information, contact Gary Morgan, Chairman +613 92245213 (W), +61 411 129094 (M)

Yours sincerely,

**Gary C. Morgan
Chairman**